

BITUFLEX - SF

Torch applied SBS modified bitumen waterproofing membrane 4mm thickness


Description

Bituflex-SF is rot-proof high performance waterproofing membrane, produced with a layer of natural slate flakes on weathering side to protect the membrane from UV radiation and ageing.

Produced in highly controlled process, the reinforcement made of nominal 200 gm/m² non-woven polyester reinforced with glass-fiber threads. And straight run bitumen modified with selected SBS polymers and stabilizers.

Standards

Complies with the requirements of ASTM D 6164 type II grade G

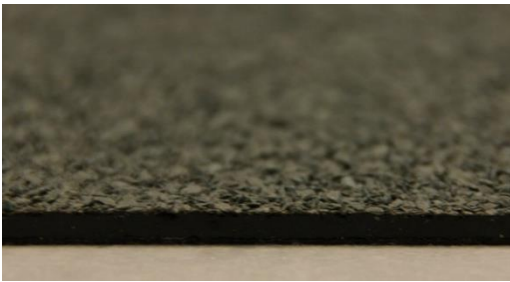

Features

- Positive barrier to water and dampness
- Excellent resistance to ageing and atmospheric agents
- Accommodates structural movements
- Designed for use and exposed system
- Provided with lap strip
- Resistant to water-born chemical attack
- Stability at high temperatures
- Excellent puncture and tear resistance
- Excellent resistance to UV rays, aging and weathering
- Easy for application and repair works

Uses

Bituflex-SF is ideal to use for new and re-roofing applications. It can be used in almost every waterproofing applications which includes roofs, balconies, basements, reservoirs, bridges, tunnels, lining for sewage canals, sub-grade structures etc.



Technical Data

PROPERTIES	RESULTS	TEST METHOD
Appearance	No defects, holes, tears, cracks or blisters	ASTM D 5147
Roll Size	1 x 10 (meter)	ASTM D 5147
Thickness	>4.0 (mm)	ASTM D 5147
Mass per unit area	>4400 (g/m ²)	ASTM D 5147
Elongation L/T @23 ± 2°C	45/45 %	ASTM D 5147
Tear Strength L/T @23 ± 2°C	500/450 N	ASTM D 5147
Puncture Resistance	700 N	ASTM D 5147
Dimension stability	+ 0.5 (%)	ASTM D 5147
High temperature stability 100 + 2°C: 2hrs	No flow at 105°C	ASTM D 5147
Low temperature flexibility	0 to - 5°C	ASTM D 5636
Water absorption	<0.15 (%)	ASTM D 5147
Granule embedment, max loss	<2 (gm)	ASTM D 5147

INSTRUCTION TO USE

Surface Preparation

The surface must be thoroughly cleaned and should be free from dust, debris, oil and protruding elements.

Priming

Apply liberal coat of the recommended primer and we recommend to use Sealcoat D41. Allow primer coat to dry until it is tack free prior to application of the membrane. All surfaces must re-primed if left more than 24 hours.

Fixing Instruction

The installation should start from one edge/end of the surface. Unroll one roll over the surface with minimum 15 cm side lap alignment. Fixing should be either loose laid or fully bonded.

Application Tools and Equipment

- Propane gas torch with related gas cylinder
- Knife / Cutter
- Trowel with a rounded tip
- Protective gloves and goggles
- Marking aids
- Measuring tape
- Fire extinguisher

BITUFLEX - SF

Torch applied SBS modified bitumen waterproofing membrane 4mm thickness

Specifications

Loose Laid

Re-roll the unrolled membrane to a length suitable for application without changing the orientation. Melt minimum 15 cm from the edges.

Fix the melt portion firmly to the pre-primed surface. Position the subsequent rolls, give edge overlapping of minimum 15 cm, side overlapping of minimum 15 cm and continue until the area is fully fixed. The melted compound should be spread with a trowel or roller to ensure a smooth tight seal.

Fully Bonded

Melt the lower surface of the membrane with a gas torch by moving the flame across the entire width of the roll. Fix the melt portion firmly to the pre-primed surface. The subsequent rolls should be done in the same manner as of loosed laid membrane.

Storage

- Keep the products packed in a dry place.
- Keep Away from direct sunlight
- Do not place the pallets on top of each other
- Rolls must always be stacked in a vertical position

Thickness

We produce different thicknesses (3,5,6 mm) are available upon request.

Health and Safety

All safety measures should be observed during application. Fire extinguishers should be available at all time on the site. Care should be taken with gas and torch should not be rested on finished surface or on any materials that can be scratched by flame or hot torch. Gloves and goggles should be worn at all time by all workers during application.

Refer to MSDS for the products.

Technical Support

International Insulation Company (IIC) – Bitugulf technical support team consist of expert engineers on the filed offers a comprehensive service support to specifiers, end users and contractors and on-site technical assistance.



INTERNATIONAL INSULATION COMPANY (BITUGULF)

Factory

Western Shuaiba Industrial, Block (3), Building (90),
Opposite of Kuwait Steel Co.

Telephone: (+965) 23262822

Fax: (+965) 23262825

Email: info@knimco.com

Showroom

Shuwaikh Industrial, Block (A), Building (139),
Opposite to Hyundai Maintenance Center

Telephone: (+965) 24912765, 90019917

Fax: (+965) 24912776

Email: shwrm@knimco.com

Website: www.knimco.com